

# RP-VPMV



Mounting position



[Dimensional drawing](#) [Selection Notes](#)

## Main specifications

Specification 1		Specification 2
item		Content
Generated pressure	(Negative pressure)	-50kPa or less
	(Positive pressure)	+30kPa or higher
Generated flow rate	(Negative pressure)	1.1L/min or more (20°C/1atm)
	(Positive pressure)	1.1L/min or more (20°C/1atm)
Air valve operation (air blow) time		0.3-10 sec

[Dimensional drawing](#) [Selection Notes](#)


## Main specifications

Specification 1	Specification 2
item	Content
Departure method	Vacuum destruction
Pump types	Diaphragm pump
Operating ambient temperature and humidity	5-40° C, 85% RH or less (non-condensing)
Protection class	IP20
International Standards	CE marking, RoHS directive
Motor types	Pulse motor (φ 35) (Power supply capacity: Rated 0.8A / Maximum 1.3A)
Encoder types	Magnetic encoder
Power supply voltage	DC24V±10%
deadline	Listed on the website under [Delivery Date Inquiry].

## Dimensional drawing

CAD図面がホームページよりダウンロード出来ます。  
[www.iai-robot.co.jp](http://www.iai-robot.co.jp)

2D/3D  
CAD

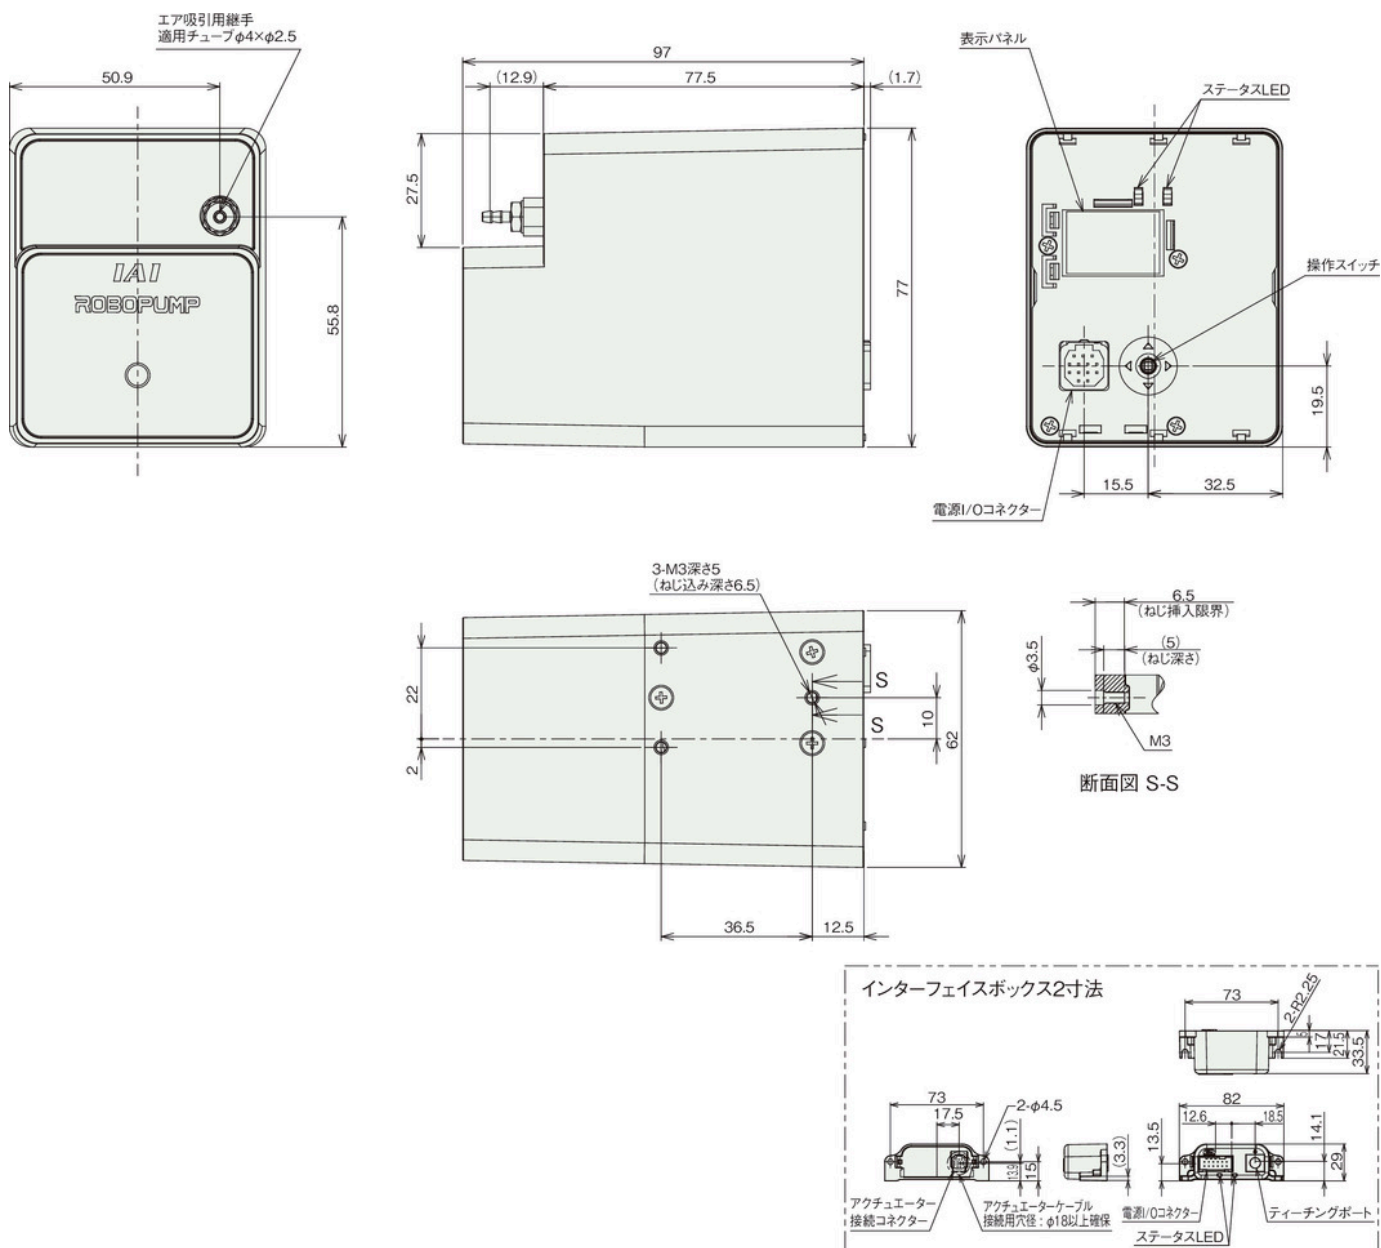

mass

item	Content
mass	400g